

48" Rangetop with Griddle

Model: KMR 1356 G / KMR 1356 LP



KMR 1356 G / KMR 1356 LP

Features:

- Backlit precision knobs
- M Pro dual stacked burner system with TrueSimmer
- M Pro Griddle
- ComfortClean dishwasher-safe grates
- Clean Touch Steel™ front

SPECIFICATIONS

KMR 1356 G — Item 26135650USA

KMR 1356 LP — Item 26135651USA

Overall Unit Width 47¹⁵/₁₆" (1217mm)

Overall Height from the base of the appliance to top, not including grates 7¹/₂" (191mm)

Overall Unit Depth to the front of control panel 26¹/₂" (673mm)

Niché

Minimum Cabinet Width 48" (1219mm)

Minimum Cabinet Depth to back of control panel 25¹/₁₆" (636.6mm)

Burners

Gas Burners: (2) 12,500 BTU; (4) 19,500 BTU

Griddle: (1) 14,300 BTU

Total BTU Output: 117,300 BTU

Gas Line Connection 1/2" NPT

Electrical

Electrical Requirements 120V, 60Hz, 15 Amps

Power Cord Yes - NEMA 5-15 plug, 4ft. (1.2m) long

Shipping

Shipping Weight 187.4 lbs. (85kg)

Support

Call 800.843.7231

20/20  2020 technologies.com


48" Rangetop with Griddle

Model: KMR 1356 G / KMR 1356 LP




PRODUCT VIEWS


Front View

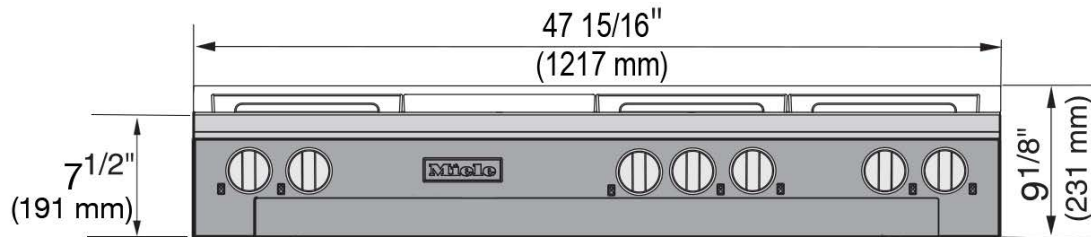

Side View

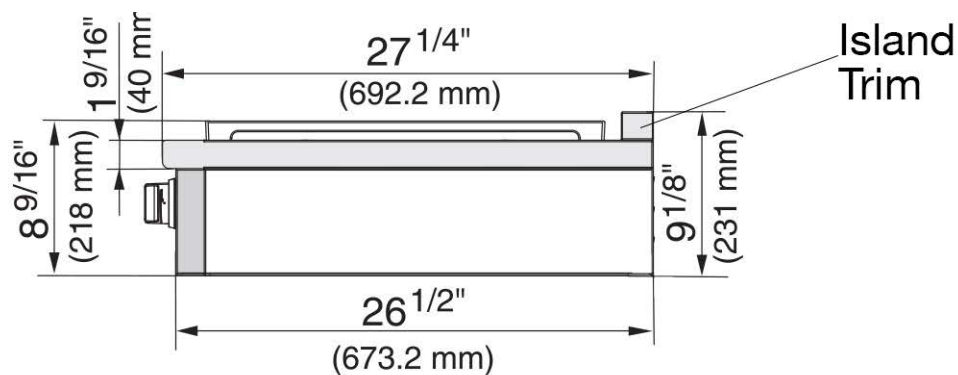

Rear View

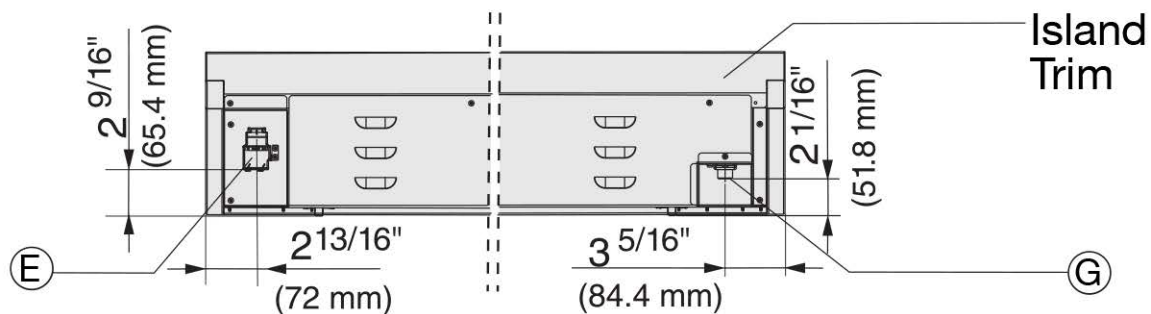

Length of power cord is 4 ft.(1.2m)

E = Electrical connection

G = Gas connection


48" Rangetop with Griddle

Model: KMR 1356 G / KMR 1356 LP



PRODUCT VIEWS

Cabinet View

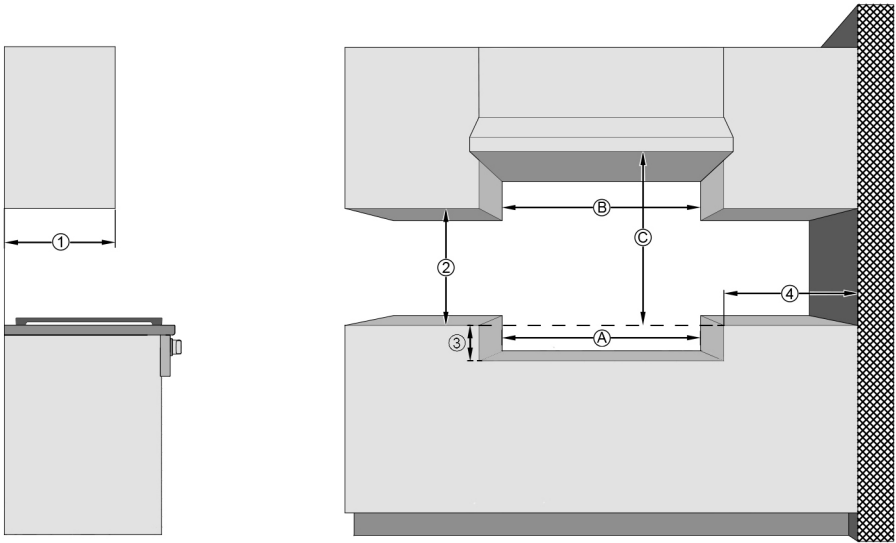

Ⓑ In case of combustible construction, an additional minimum clearance of 6" (each side) is necessary.

Position	Dimension	Description
①	13" (330 mm)	Maximum depth of top cabinet
②	18" (457 mm)	Minimum distance to bottom edge of top cabinet
③	7 1/2" (191 mm)	Distance top edge of worktop to top edge of platform
④	10" (254 mm)	Minimum distance to combustible surfaces
Ⓐ	48" (1219 mm)	Width of cabinet opening
Ⓑ	6" + Ⓐ + 6"	In case of the presence of combustible material an additional minimum clearance of 6" (each side) is necessary. Ensure local codes are observed.
Ⓒ	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.
	36" (910 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL Blower).
	For all other Hoods, please consult with manufacturer's instructions for required distances.	

For gas and electrical connections, see Rear Product View